

# 溶智纳芯 Rong zhi na xin

## PA150/13/30 型封装压电陶瓷

### 应用领域

- 静态和动态精密定位
- 光纤定位
- 激光调谐
- 纳米技术



地址：黑龙江省哈尔滨市松北区华美太古广场 q32-2 号

网址：RongZhiNaXinHaerbinTechnology.Ltd

联系电话：15846526797

电子邮箱：rznxkj@163.com




# PA150/13/30 型封装压电陶瓷



## 技术参数

- 1, 输出位移量:  $30 \mu\text{m} \pm 10\%$ ;
- 2, 刚度:  $33\text{N}/\mu\text{m}$ ;
- 3, 驱动电压:  $-20\text{V}$  至  $+150\text{V}$ ;
- 4, 最大推力/拉力:  $1000\text{N}/200\text{N}$ ;
- 5, 静电容量:  $3.4 \mu\text{F} \pm 10\%$ ;
- 6, 工作温度:  $-60^\circ\text{C}$  至  $+120^\circ\text{C}$ ;
- 7, 谐振频率:  $34\text{KHz}$ ;
- 8, 图中单位:  $\text{mm}$ ;

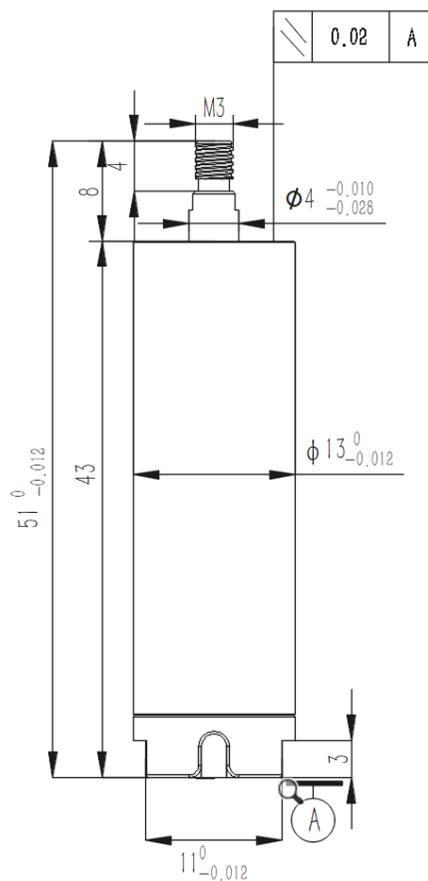

底部陶瓷驱动线BNC接头蔽线长大于15m  
可水平或垂直放置，线粗1.8mm

# PA150/13/30 型封装压电陶开环位移-电压曲线

